

CheckPoint II

Data sheet

Portable O₂ and CO₂ gas analyser

- For quality control of modified atmosphere packages

NEW



Shown with optional SmartPen and DockIn station

Benefits


- Easy to use
- Portable
- Optional bar code scanner for easy product selection
- Easy quality control of modified atmosphere packages
- Better traceability with data logging function
- Intuitive PC software
- Alerts operator to any exceeded alarm levels
- Logging of operator name, batch numbers etc.

Features

- Data logging of up to 25 products with each 99 measurements (more products available for selection in PC software)
- Data transfer via USB
- Available in O₂ or O₂/CO₂ versions
- Long lasting lithium-ion battery
- PC software included
- 12 months' calibration interval
- Temperature and pressure compensated CO₂ measurement
- Delivered ready to use
- Measuring time: 6 seconds

PC Software

The CheckPoint II is delivered with an easy to use PC software. The QC manager can easily control up to 8 CheckPoint II units in a production environment. The PC software makes it easy to set-up new products, manage operators, collect data and export data for further analysis.

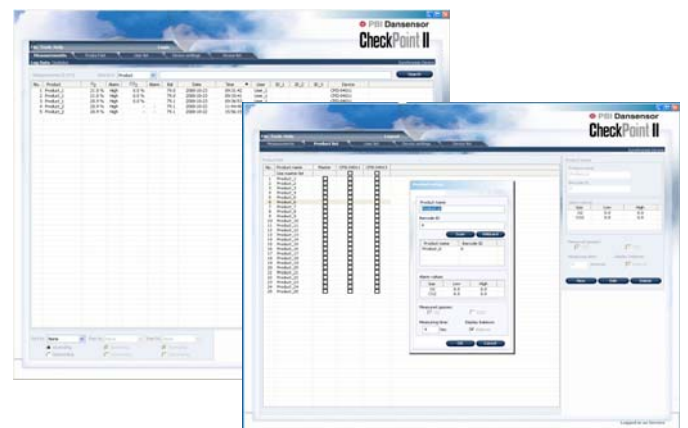

Introduction to the CheckPoint II

CheckPoint II is a portable quality control instrument for modified atmosphere packaging. In brief the CheckPoint II has data logging capabilities, the possibility to transfer data to a PC and an optional bar code scanner. Like its 'big brother' the CheckMate II, the CheckPoint II has a built-in intelligence to alert the operator to any quality problems with the gas content in the package. The CheckPoint II is ideal for small to medium volume production facilities or other situations where a portable analyser is useful.

The CheckPoint II is an easy to use headspace analyser that ensures the traceability of your modified atmosphere packaging - without relying on paper logs.

CheckPoint II is available in four versions:

- CheckPoint II O₂
- CheckPoint II O₂/CO₂
- CheckPoint II O₂ - with built-in bar code scanner
- CheckPoint II O₂/CO₂ - with built-in bar code scanner

CheckPoint II has the following options:

- SmartPen - retractable syringe
- DockIn - for easy PC connection and faster recharging

The CheckPoint II is delivered ready to use, including power supply, PC software, USB cable, storage and transportation box, spare needles and filters.

Principle of sensors

Oxygen sensor

The CheckPoint II O₂ sensor is based on an electrochemical technology. In the sensor, a chemical reaction produces a signal corresponding to the concentration of the gas. The only disadvantage of the electrochemical sensor is the cross-sensitivity towards CO₂. For this reason PBI-Dansensor always recommends a CheckPoint II O₂/CO₂ for applications containing more than 25% CO₂ - the reason being that the O₂/CO₂ model compensates for the CO₂ content. For applications with 65-100% CO₂ we also recommend our CheckMate II in order to obtain a higher accuracy O₂ reading.

Carbon dioxide sensor

The CO₂ sensor is based on infrared technology, which gives a long-lasting sensor lifetime. The CO₂ sensor range is 0-100%. The PBI-Dansensor CO₂ sensor is fully temperature and pressure compensated, which means that it is not influenced by ambient air pressure or ambient temperature.

Common specifications


General	
Auto power off after 10 minutes	
Memory function for 25 products, each with 99 measurements	
User calibration - daily offset calibration to atmospheric air (20.9% O ₂)	
Cabinet	
Dimensions:	65 x 130 x 160 mm (HxWxD)
Weight:	0.7 kg
Cabinet:	IP53 & anodized aluminium
Battery and power supply	
Power supply:	100 - 240 VAC, 50 - 60 Hz, max. 20 W
Battery:	7.2V lithium ion battery, >2000 measurements per recharge
User interface	
Display:	3.1" monochrome backlit display
Connections	
USB:	USB 2.0 Connector Type A
Bar code scanner	
Safety:	Bar code scanner safety (for devices with built-in scanner only); Laser Class 1 product, according to IEC/EN 60825-1:2007

PBI-DS-Dash-gastec-CPii-LUK-1

Sensor system

O ₂ version	
Sensor type:	Electrochemical
Range:	0 - 100%
Accuracy:	See graph below
Sample volume:	Minimum 6 ml
Expected lifetime:	> 2 years at O ₂ concentrations < 20.9%
CO ₂ version	
Sensor type:	Infrared
Range:	0 - 100%
Accuracy:	2% absolute from 0-20% CO ₂ , 3% absolute above 20% CO ₂
Sample volume:	Minimum 6 ml
Lifetime:	> 5 years
Resolution:	
Sensors	0.1%

Oxygen sensor tolerance

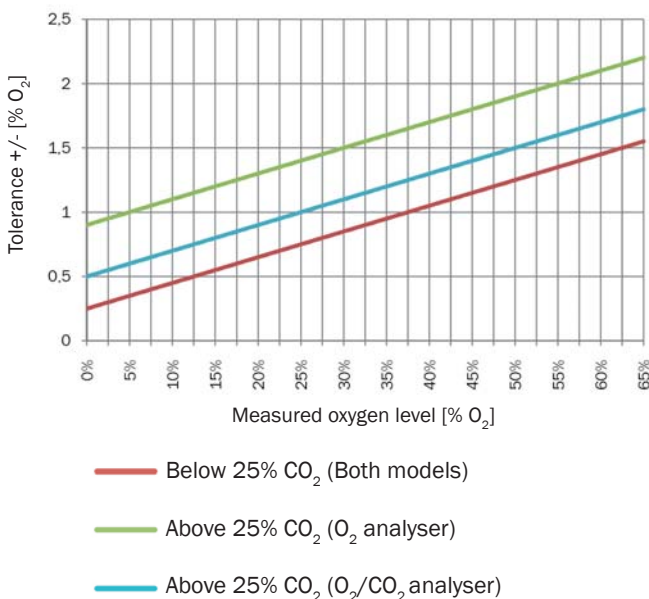

Options



CheckPoint II DockIn



CheckPoint II SmartPen

Distributor:



LAUPER Instruments AG
 Irisweg 16 B
 CH-3280 Murten
 Tel. 026 672 30 50 Fax. 026 672 30 59
www.lauper-instruments.ch



PBI-Dansensor America Inc.
 139 Harristown Road
 Glen Rock, NJ 07452, USA
 Tel.: (+1) 201 251 6490
 Fax: (+1) 201 251 6491
 e-mail: info-us@pbi-dansensor.com
 Website: www.pbi-dansensor.com

PBI-Dansensor A/S
 DK - 4100 Ringsted
 Denmark
 Tel.: (+45) 57 66 00 88
 Fax: (+45) 57 66 00 99
 e-mail: info@pbi-dansensor.com
 Website: www.pbi-dansensor.com