



# TIGER XTL

Pioneering Gas Sensing Technology.  
[ionscience.com](http://ionscience.com)







# Tiger XTL

**Low cost Volatile Organic Compound (VOC) detector with reliable market leading accuracy!**



## Ultimate Performance

The Tiger XTL is a ground breaking low cost entry level VOC detector with all the essential functions you need to detect VOCs. The instrument has the lowest running costs on the market with inexpensive disposable parts, lamps and filters. This variant of the hugely popular Tiger XT VOC detector is low on cost but high on performance. Its revolutionary, patented PID sensor technology with resistance and anti-contamination design provides market leading accuracy and run time. Combined with 24 hour battery life, these features maximise field time by minimising erroneous readings in high humidity and drift in hard environments.

The Tiger XTL portable VOC gas detector is ETL (Electrical Testing Laboratories), KGS (Korean Gas Safety), IECEx (International Electrotechnical Commission System for Certification to Standards Relating to Equipment for Use in Explosive Atmospheres) certified. It is also ATEX approved meaning the instrument is intrinsically-safe.

## Key Features

### >> Improved Robust Design

The instruments rugged body can withstand harsh environments



### >> Long Rechargeable Battery Life

When fully charged, the lithium-ion battery can last up the 24 hours



### >> IP65 Ingress Protection

Protection against a range of conditions and weather temperatures



### >> Fast Reponse Time & Clear Down

<2 second response time, one of the fastest and most accurate on the market



### >> Instantaneous Alarms

Bright visible alarms: **RED** & **AMBER** with loud sounder (95 dBA at 300 mm (12"))



### >> Humidity Resistant and Anti-Contamination Design

Patented Fence Electrode Technology ensures optimal performance and extends run time



## Tiger XTL Features



### Minimal Instrument Downtime

The Tiger XTL has been designed with the user in mind for ease of use and servicing. Batteries can be replaced in potentially explosive environments due to the innovative Intrinsically Safe design. Low cost filters and lamps can be easily changed in minutes, minimising instrument downtime.

### Typical Applications

Typical applications for the Tiger XTL include: Environmental Monitoring, Soil Contamination Detection, VOCs in Landfill, Confined Space Entry, Emergency Response, Wing Tank Entry, Fumigation Gases & Medical Gases.

### 2 Year Extended Warranty

The Tiger XTL can be registered online which extends warranty to up to 2 years. Register your instrument online within one month of purchase to [extend the warranty](#).

# Technical specifications

## Minimum resolution\*

- 0.1 ppm

## Maximum reading

- 5,000 ppm

## Response time

- T90 < 2 seconds


## Accuracy

- $\pm 5\%$  display reading  $\pm$  one digit

## Linearity\*

- 5% display reading  $\pm$  one digit

## Intrinsically safe approvals

-  II 1G Ex ia IIC T4 Ga
- Tamb = -15 °C  $\leq$  Ta  $\leq$  +45 °C (with lithium ion battery pack)
- Tamb = -15 °C  $\leq$  Ta  $\leq$  +40 °C (with alkaline battery pack)
- ITS-I22ATEX35111X
- IECEx ITS 22.0025X
- ITS22UKEX0635X
- 3193491 conforms to UL Std. 913, 61010-1
- Certified to CAN/CSA Std. C22.2 No. 61010-1

## Battery life

- Li-ion: life up to 24 hours continual use

## Lamps

- 10.6 eV Krypton PID lamp (standard)

## Data logging\*

- Push-to-log, 128 zones, 80,000 data points

## Calibration

- Standard calibration 100 ppm isobutylene
- Custom calibration capability

## Alarm

- Flashing LED and 95 dBA at 300mm (12") audible sounder
- Selectable vibrating alarm

## Flow rate

- $\geq 220$  ml/min (with blocked flow alarm)

## Temperature

- Operating: -20 to 60 °C, -4 to 140 °F
- Humidity: 0-99% RH (non condensing)


## Protection

- Designed to IP65
- EMC tested to EN61326-1:2013 & EN50270:2015 & CFR 47:2008 Class A

## Weight & dimensions

- 370 mm (H) x 91 mm (W) x 60 mm (D)
- 870g

TIGER XTL V1.0 This publication is not intended to form the basis of a contract and specifications can change without notice.  
All specifications quoted are at calibration point and under the same ambient conditions.  
Specifications are based on isobutylene calibration at 20 °C, 90% RH and 1000 mBar  
\*Model dependant.

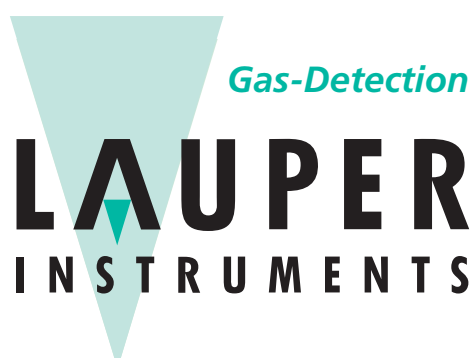

## Lauper Instruments AG

Irisweg 16 B

CH-3280 Murten

Tel. +41 26 672 30 50

info@lauper-instruments.ch

www.lauper-instruments.ch