NOISE INDICATOR NI-100


The Noise Indicator NI-100 alerts users to potentially dangerous noise levels, helping identify areas where further noise assessment or hearing protection may be needed. Users clip the device to a shirt or jacket and its LED light delivers a clear indicator when noise levels exceed a potentially hazardous threshold. Its small size and lightweight design make it ideal for workers in a variety of industries.



Features and Benefits

- + Provides visual "Go/No Go" indication of noise levels below or above 85 dBA
- + Flashing green indicates noise level is below 85 dBA and flashing red indicates noise level is above 85 dBA and hearing protection may be needed
- + Simple one-button operation with a rechargeable battery
- + Small and lightweight
- + Clips to lapel or shirt pocket
- + Provides an affordable training tool for helping workers know when hearing protection may be required
- + Increase awareness of hearing conservation guidelines
- + Can be used as a mapping tool to qualify future noise studies



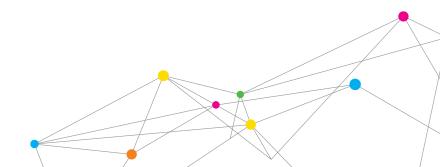

SPECIFICATIONS

NOISE INDICATOR NI-100

Size $2''(L) \times 1.4''(W) \times 0.5''(D)$

5.1 cm (L) x 3.6 cm (W) x 1.3 cm (D)

Weight 0.6 oz (17 g)

Temperature

-14 to 122°F / -10 to 50°C Operating/Storage **Humidity Range** 0 to 95%; non-condensing

Accuracy 3 dB

Alert Level Flashes red when >85 dBA

Flashes green when <85 dBA

Battery Li-Poly (flat cell)* with approximately 200 hours of operating before recharging

Battery Life Approximately two years of

charging cycles

A mini-USB cable (sold separately) plugs Charging

into bottom port of device

Auto-Power Off The device will power off after

approximately 10 hours

*Not certified intrinsically safe

Specifications are subject to change without notice.

Quest is a trademark, and TSI and the TSI logo are registered trademarks of TSI Incorporated.



One-button operation

- + Simply clip to lapel and power-on
- + Easy for workers to use and understand

Small Size

+ Compact, lightweight design for increased hearing protection compliance

Visual "Go/No Go"

- + Green LED ("Go") flashes when noise level is below 85 dBA
- + Red LED ("No Go") flashes when noise level exceeds 85 dBA
- + Easy-to-understand visual indication when hearing protection may/may not be needed

Rechargeable battery

- + Provides up to 200 hours of use between charges
- + 10-hour auto-power off helps prolong battery life for extra cost savings



TSI Incorporated - Visit our website www.tsi.com for more information.

USA Tel: +1 800 874 2811 UK **Tel:** +44 149 4 459200 **Tel:** +33 1 41 19 21 99 France Germany Tel: +49 241 523030

India China **Singapore**

Tel: +91 80 67877200 Tel: +86 10 8219 7688 Tel: +65 6595 6388





Lauper Instruments AG Irisweg 16B CH-3280 Murten

Tel: +41 26 672 30 50 info@lauper-instruments.ch www.lauper-instruments.ch